

marcolin

7 ACCARIA



ZAM 240 BL

DOUBLE



GRAPE TRAILER ZAM 240 BL DOUBLE BODY

Standard equipment:

60 Km per hour approval.

Watertight AISI 304 floureshed stainless steel double body.

Hydraulic two-way tipping system. Indipendent body.

Watertight double extension on right side with hydraulic opening.

Parabolic leaf spring suspensions with rod.

ZAM 270 Independent hydraulic suspensions with hydraulic lifting of the front axle.

Brake regulator.

Industrial axles (10 studs).

Self-steering rear and front axles.

Stainless steel light bar.

PVC water tank. PVC mudguards.

Hydraulic parking stand. PVC toolbox.

Lateral lights. Chrome wheel nut coverings. Safety support.

Optionals:

Watertight hydraulic opening of the left side extension. Electro-hydraulic unit with remote radio control. Steering adjuster. PVC Manual covering. Pneumatic PVC side covering for one or two sides. Camera and monitor kit for reverse.

NEW: Steering drawbar with hydraulic command. **NEW: ABS: Anti-lock braking system. NEW: Alloy wheels.**

LED Lights. Work lights.

K80 towing hitch. 40 mm towing hitch; F3 towing hitch.

NEW **Alloy wheels** on demand

7											
	MODEL	BODY DIMENSIONS cm	OVER SIDE H cm	HYDRAULIC SIDE H cm	VOLUME m ³	N° OF AXLES	TARE TONS	GROSS W. TONS	TIRES	BRAKE	BRAKE SIZE
	ZAM 240 P03B DOUBLE BL32	320x240x130 N° 2 BODIES		70	25	3	6	24 + vertical load	385/55 R22,5 new	Pneumatic	406x120 10 studs
	ZAM 270 P03B DOUBLE BL32	320x240x130 N° 2 BODIES	70		25		6,6	27 + vertical load			
	ZAM 270 P03B DOUBLE BL35	350x240x130 N° 2 BODIES			27		6,9				

NEW

Hydraulic suspensions

on ZAM 270 model

STANDARD COLOURS: CHASSIS (MONOCOLOUR) RED ZACCARIA BLACK GRAY 10246 **OPTIONALS:**


METALLIC PAINT

ON DEMAND COLOURS






ZAM 240 BL DOUBLE -detail-



NEW: On demand, steering drawbar with hydraulic command on all the Mother Regulation trailers.



Electro-hydraulic unit with remote control

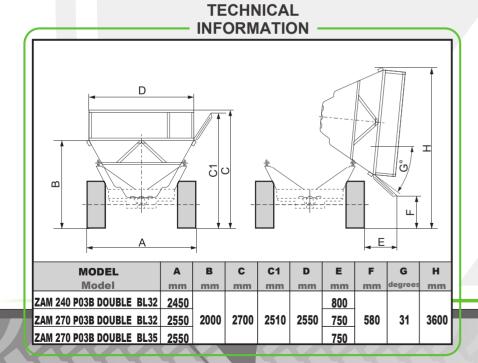

ZAM 240 BL

MOTHER

GRAPE TRAILER ZAM 240 BL SUPER

Standard equipment:

AISI 304 floureshed stainless steel body. Hydraulic two-way tipping system by distributor. Watertight extension on right side with hydraulic opening. Parabolic leaf spring suspensions with rod.

with hydraulic lifting of the front axle.

Brake regulator. Industrial axles (10 studs). Self-steering rear and front axles. Stainless steel light bar. PVC water tank. PVC mudguards. Hydraulic parking stand. PVC toolbox. Lateral lights. Chrome wheel nut coverings. Safety support.

Optionals:

Watertight hydraulic opening of the left side extension. Electro-hydraulic unit with remote radio control. Removable central stainless steel cloth-holder tube. Steering adjuster. PVC Manual covering. Pneumatic PVC side covering for one or two sides. Camera and monitor kit for reverse.

NEW: Steering drawbar with hydraulic command. **NEW: ABS: Anti-lock braking system. NEW: Alloy wheels.**

> LED Lights. Work lights. K80 towing hitch.

ZAM 270 Independent hydraulic suspensions

40 mm towing hitch; F3 towing hitch.

NEW **Hydraulic suspensions** on ZAM 270 model

On demand: 60 km/h speed

NEW Alloy wheels on demand

MODEL	BODY DIMENSIONS cm	OVER SIDE H cm	HYDRAULIC SIDE H cm	VOLUME m ₃	N° OF AXLES	TARE TONS	GROSS W. TONS	TIRES	BRAKE	BRAKE SIZE	
ZAM 240P03A BL55 SUPER	550x240x130	60	60	20		5					
ZAM 240P03A BL55 MAXI	550x240x130	70	70	21	3	5,3	24 + vertical load	385/55 R22,5 new	Pneumatic	406x120 10 studs	
ZAM 240P03A BL60 MAXI	600x240x130	70	70	23	3	5,5					
ZAM 270 P03A BL MAXI	600x240x130	70	70	23		5,8	27 + vertical load				



OPTIONALS:



TECHNICAL **INFORMATION** D $\frac{5}{2}$ 0 മ Ε MODEL C Е G В C1 D Model mm mm mm mm mm mm mm degrees ZAM 140 PO2A BL45 ZAM 160 P02A BL50 ZAM 160 PO2A BL50 SUPER ZAM 240 PO3A BL55 SUPER ZAM 240 PO3A BL55 MAXI ZAM 240 PO3A BL60 MAXI ZAM 270 PO3A BL60 MAXI

vineyard


TIRES

New tires 385/55 R22,5 Height 1000; Width 385







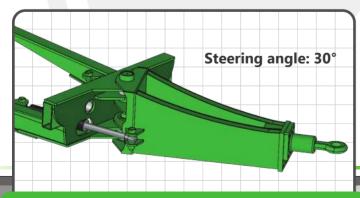

NEW: On demand, steering drawbar with hydraulic command on all the Mother Regulation trailers.





Bolted towing hitch with jointed kneecap



GRAPE TRAILER ZAM 160 BL

Standard equipment:

AISI 304 floureshed stainless steel watertight body. Hydraulic two-way tipping system by distributor. Watertight extension on right side with hydraulic opening. Parabolic leaf spring suspensions with rod. Brake regulator. Industrial axles (10 studs). Self-steering rear axle. Stainless steel light bar. PVC water tank. PVC mudguards. Hydraulic parking stand. PVC toolbox. Over side H 48 cm. Lateral lights. Chrome wheel nut coverings.

Optionals:

Safety support.

Watertight hydraulic opening of the left side extension. Electro-hydraulic unit with remote radio control. Removable central stainless steel cloth-holder tube. Steering adjuster. PVC Manual covering. Pneumatic PVC side covering for one or two sides. Camera and monitor kit for reverse.

NEW: Steering drawbar with hydraulic command. **NEW: ABS: Anti-lock braking system. NEW: Alloy wheels.**

> LED Lights. Work lights. K80 towing hitch. Bolted towing hitch with jointed kneecap.

STANDARD COLOURS CHASSIS (MONOCOLOUR)

RED ZACCARIA

GREEN ZACCARIA

GREEN JD BLUE NH

BLACK GRAY IC246

OPTIONALS:

METALLIC PAINT

ON DEMAND COLOURS

On demand: 60 km/h speed

N E W **Alloy wheels** on demand

MODEL	BODY DIMENSIONS cm	OVER SIDE H cm	HYDRAULIC SIDE H cm	VOLUME m ³	N° OF AXLES	TARE Tons	GROSS.W Tons	TIRES	BRAKE	BRAKE SIZE
	CIII	11 CIII	TT CIII				14 +			
ZAM 140 P02A BL45	450x220x120	48	48	13		3,4	vertical load			
ZAM 160 P02A BL 50	500x240x130	48	48	16	2	4	16 +	385/55 R22,5 new	Pneumatic	406x120 10 studs
ZAM 160 P02A BL 50 SUPER	500x240x130	60	60	18		4,2	vertical load			

GRAPE TRAILER ZAM 200 BL

Standard equipment:

AISI 304 floureshed stainless steel watertight body.

Hydraulic two-way tipping system by distributor.

Watertight extension on right side with hydraulic opening.

Parabolic leaf spring suspensions

With regulating connecting rod.

Brake regulator (with pneumatic brake).

Industrial axles (10 studs).

Self-steering rear and front axles.

Stainless steel light bar.

PVC water tank.

PVC mudguards.

Hydraulic parking stand.

PVC toolbox.

Optionals:

Watertight hydraulic opening of the left side extension.

Electro-hydraulic unit with remote radio control.

Steering adjuster.

PVC Manual covering.

Pneumatic PVC side covering for one or two sides.

Camera and monitor kit for reverse.

LED lights.

Work lights.



MODEL	BODY DIMENSIONS cm	OVER SIDE H cm	HYDRAULIC SIDE H cm	VOLUME m³	N° OF AXLES	TARE Tons	GROSS W. Tons	TIRES	BRAKE	BRAKE SIZE
ZAM 200 BLP SUPER	550 240 420	60	60	20	2	4,7	20	385/55 R22,5	Pneumatic	406x120
ZAM 200 BLI SUPER	550x240x130	60	80	20	3	4,7	20	new	Hydraulic	10 studs

OPTIONALS:

RED ZACCARIA
GREEN ZACCARIA
GREEN JD BLUE NH
BLACK GRAY IC246

vineyard

METALLIC PAINT

ON DEMAND COLOURS



Hydraulic two-way tipping system by distributor.

Watertight extension on right side with hydraulic opening.

Parabolic leaf spring suspensions with rod.

Brake regulator (with pneumatic brake).

Self-steering rear axle.

Stainless steel light bar.

PVC water tank. PVC mudguards.

Hydraulic parking stand. PVC toolbox.

Over side H 48 cm.

Optionals:

Watertight hydraulic opening of the left side extension.

Electro-hydraulic unit with remote radio control.

Removable central stainless steel cloth-holder tube.

Steering adjuster. PVC Manual covering.

Pneumatic PVC side covering for one or two sides.

LED lights. Work lights.

MODEL	BODY DIMENSIONS cm	OVER SIDE H cm	HYDRAULIC SIDE H cm	VOLUME m³	N° OF AXLES	TARE Tons	GROSS W. Tons	TIRES	BRAKE	BRAKE SIZE
ZAM 120 BLP	450x220x120	48	48	13	2	2,9	12	385/55 R19,5 new	Pneumatic	300x90 8 studs
ZAM 120 BLI	43082208120	40							Hydraulic	
ZAM 140 BL45P	l	450x220x120 48	48 48	13	2	3,2	14	385/55 R22,5 new	Pneumatic	400x80 10 studs
ZAM 140 BL45I		40							Hydraulic	
ZAM 140 BL50P	500x240x130	48	48	46.5	2	2.0	44		Pneumatic	
ZAM 140 BL50I		40	70	16,5	2	3,9	14		Hydraulic	

with pneumatic PVC

side covering

OPTIONALS

METALLIC PAINT

ON DEMAND COLOURS

GRAPE TRAILER ZAM 60 BL

Standard equipment:

AISI 304 floureshed stainless steel watertight body. Hydraulic two-way tipping by tractor distributor.

Fixed sides (without hydraulic side).

Galvanized light bar.

PVC mudguards. Manual parking stand.

PVC toolbox.

Optionals:

Removable central stainless steel cloth-holder tube.

PVC Water tank.

PVC Manual covering.

Hydraulic parking stand.

STANDARD COLOURS CHASSIS (MONOCOLOUR)

- RED ZACCARIA
- GREEN ZACCARIA
- GREEN JD BLUE NH
- BLACK
- GRAY IC246

OPTIONALS

- **METALLIC PAINT**
- **ON DEMAND COLOURS**




vineyard

MODEL	BODY DIMENSIONS cm	OVER SIDE H cm	HYDRAULIC SIDE H cm	VOLUME m³	N° OF AXLES	TARE Tons	GROSS W. Tons	TIRES	BRAKE	BRAKE SIZE
ZAM 60 BLI	390x210x120	20	-	8	1	15	60	355/50 R22,5 used	Hydraulic	300x90

One axle dumper ZAM 25/40/50 D (from 2,5 to 5 Tons)



TECHNICAL INFORMATION

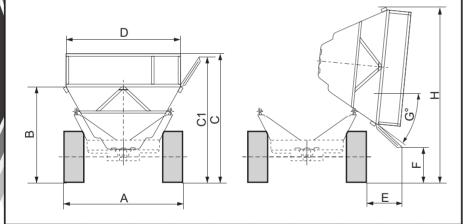

MODEL Model	A mm	B mm	C mm	C1 mm	D mm	E mm	F mm	G degrees	H mm	
ZAM 60 BL	2100	1750	1950	-	2250	550	950	35	3300	
ZAM 120 BL	2250	1800	2300	2200	2350	600	650	32	3350	
ZAM 140 BL 45	2300	1850	2350	2250	2350	600	700	32	3400	
ZAM 140 BL 50	2300	2000	2500	2400	2550	650	750	31	3600	
ZAM 200 BL	2450	2000	2630	2490	2550	725	660	31	3600	





PVC covering systems



Front sliding
PVC manual covering
with crank



Pneumatic PVC side covering.
Right side.
Activation by remote control.



Pneumatic PVC side covering.

Both sides.

With cloth-holder chassis rise.

Activation by remote control.







ZACCARIA SRL

Via Enrico Fermi, 350 I - 41055 Montese (Modena) - Italy Tel. +39 (0)59 981750 Fax: +39 (0)59 982353 www.zaccariarimorchi.com info@zaccariarimorchi.com



Scan the QR CODE to see our VIDEOs zaccaria trailers youtube www.facebook.com/zaccariarimorchi

in www.linkedin.com/company/zaccaria-srl.

www.youtube.com/zaccariatrailers

www.instagram.com/zaccaria rimorchi

Branches and Warehouses:

I - 41015 Nonantola (Modena) Via Zuccola, 12 - Italy

